

SX-3000

Standalone Integrated Media Block (IMB)

Every function you could possibly wish for your digital cinema
in a single media block



“ GDC Technology is proud to introduce the new SX-3000 Standalone Integrated Media Block (IMB), our industry first standalone IMB which eliminates the need for an external file server. ”

GDC SX-3000 Standalone Integrated Media Block (IMB)

SX-3000
IMB

Standalone


Every function you could possibly wish for your digital cinema in a single media block

Why choose SX-3000 Standalone IMB?

1

Lower Maintenance Costs


The SX-3000 eliminates the need for an external file server and comes with SMS software and optional built-in storage.

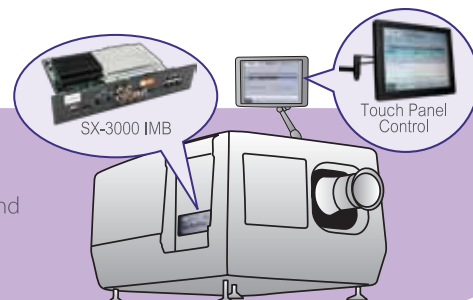

2

Lower Operation Costs

The SX-3000 allows long distance content streaming and remote access via gigabit Ethernet connection. Also automation can be controlled via Ethernet cable which makes SX-3000 IMB suitable for boothless design.

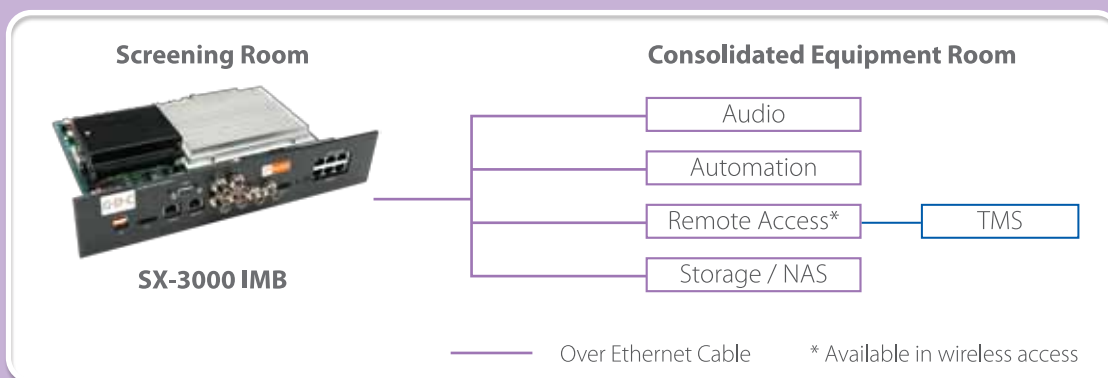

3

High Frame Rates

The SX-3000 supports high frame rate content in 2D and 3D (48fps & 60fps per eye).

4

All Image Resolution


The SX-3000 supports SD, HD, 2K and 4K resolution.

5

Flexible Storage Options

The SX-3000 offers:

1. Internal storage options.
2. External storage via Ethernet, eSATA or USB.
3. Playback of DCP from TMS in real-time is supported.

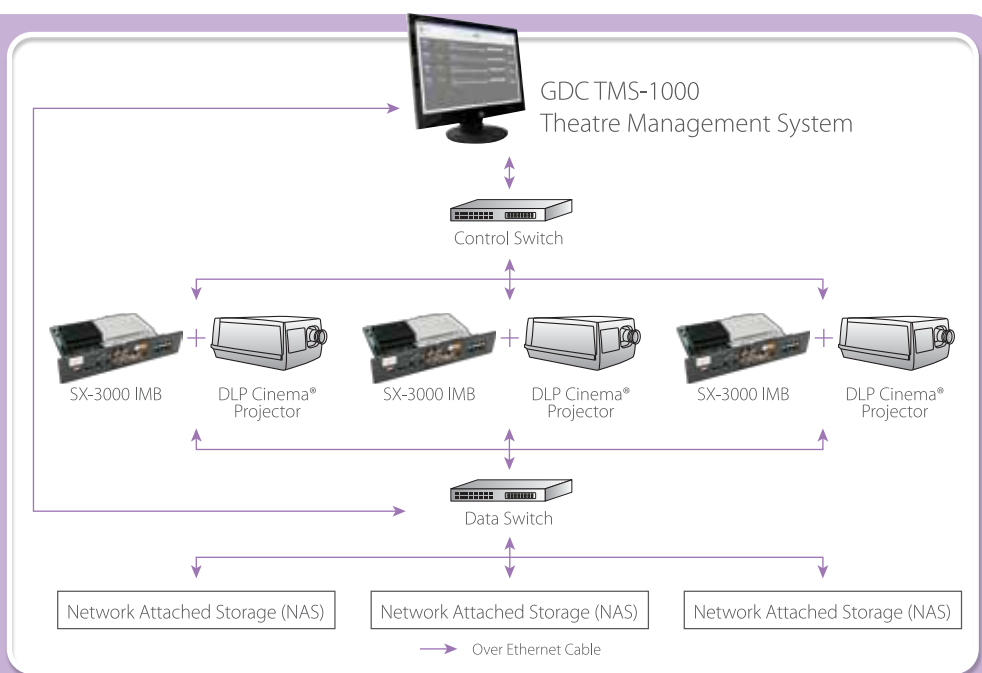

6

Comprehensive Support for Alternative Content

The SX-3000 supports HDMI input, 3G-SDI input and network live streaming. It also supports image scaling from HD to 4K.

7

Live 3D Support (Optional)

The SX-3000 comes integrated with 3D Demuxing[#] (side-by-side) which makes receiving high-quality 3D broadcasts possible. It also provides a built-in integrated 3D decoder to seamlessly support 3D Live broadcast without requiring additional decoder.

[#] RealD LIVE and SENSIO[®] Hi-Fi 3D Live support available


8

Security Safeguards


The SX-3000 is designed to meet FIPS-140 and DCI compliance.

SX-3000 Standalone IMB Technical Drawings


Front View

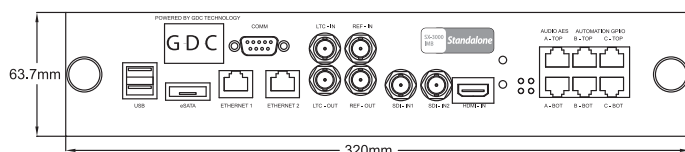

Top View

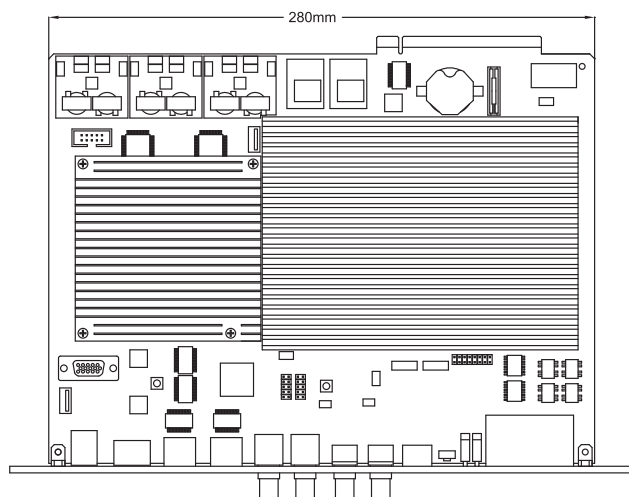

Side View

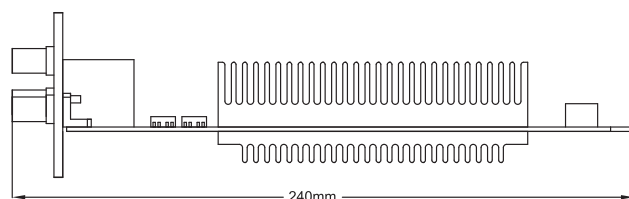

SX-3000 Standalone IMB Technical Specifications

Physical

Dimensions	320(W) x 240(D) x 63.7(H) mm
Weight	1.5 kg

Environmental

Operating temperature	5°C to 40°C (41°F to 104°F)
Operating humidity	20% to 90%, non-condensing
Operating altitude	10,000 ft. above sea level

Power

Max power consumption	75W
-----------------------	-----

Video Specifications

JPEG 2000	4K – 24p (2D) 2K – 24, 48, 60 (2D) 2K – 24, 48, 60 (3D) SD/HD SMPTE Digital Cinema Package (DCP), Interop DCP, DSR [*]
MPEG 2/MPEG 4 Packaging	

Audio Output

Digital uncompressed audio	16/24-bit AES/EBU, 16 channels, 48/96 KHz 2 x RJ45
----------------------------	--

System Interfaces

Ethernet 1 and 2	2 x RJ-45 (1000 BaseT)
eSATA	x 1 (external storage)
USB2.0	2 x USB A-Type Female
LTC	In & Out (2 x BNC)
REF	Passive loop output / Video sync input (2 x BNC)
HDMI	x 1 (alternative content input)
3G-SDI	x 2 (alternative content input)
8-port GPI/Os	4 x RJ45 (8 GPIs and 8 GPOs)
RS232	Debug port

Built-in Storage (Optional)

64 GB^{*}

Security

AES 128-bit encrypted data storage
Civolution (NexGuard[®]) forensic
watermarking

Subtitles

Subtitle overlay
Projector Cinecanvas support

User Interface

PC / Mac / SX-2000 server control	Remote access to the screen management system (SMS)
--------------------------------------	--

Third-party Integration Options

TMS	GDC, Third-party [*]
3D system	RealD, Dolby 3D, MasterImage, active systems
4D system	D-BOX Motion Code™, 4D plex
Closed Captioning Device	USL WGBH (Rear Window Captioning Device)

Integrated 3D Live Specifications

Video	MPEG 2/ MPEG 4
Audio	Dolby Digital (AC-3) [*] / MPEG 2 audio
3D Demuxing	Side by side / Third-party [#]
Stream Format	UDP Multicast of MPEG 2 Transport Stream

^{*} Supports Dolby Digital (AC-3) in pass-through mode only, which requires external AC-3 decoder or sound processor for integration

^{*} Subject to customers' requirement and availability

^{*} Please check with your TMS provider

GDC Technology Offices

USA (Los Angeles, CA)

1016 West Magnolia Boulevard
Burbank, CA 91506, USA
Tel : +1 818 972 4370 /
+1 877 743 2872 (Toll Free)
Fax : +1 877 643 2872

USA (Sterling, VA)

21155 Whitfield Place, Suite 207,
Sterling, VA 20165, USA
Tel : +1 877 337 0868 (Toll Free)
Fax : +1 571 313 0468

Spain (Barcelona)

Av. Diagonal, 177, 9th Floor
08018 Barcelona, Spain
Tel : +34 93 238 14 10
Fax : +34 93 309 31 88

Hong Kong

Unit 1-7, 20th Floor,
Kodak House II,
39 Healthy Street East,
North Point, Hong Kong
Tel : +852 2523 6851
Fax : +852 2579 1131

Japan (Tokyo)

7F Nishino Kinryo Bldg,
4-9-4, Hatchobori, Chuo-ku
Tokyo 104-0032, Japan
Tel : +81 3 3523 2650
Fax : +81 3 3523 2651

Singapore

6 Changi South Street 2,
Fedex Building, Level 7,
Singapore 486349
Tel : +65 6222 1082
Fax : +65 6222 1089

China (Shenzhen)

5th Floor GDC Building,
No.9 Hi-tech Middle 3 Road,
Science & Technology Park,
Nanshan District,
Shenzhen, P.R. China 518057
Tel : +86 755 8608 6000
Fax : +86 755 8608 8098

China (Beijing)

Rm. 609-618, Office Building,
20# Xinde Street,
Xicheng District,
Beijing, P.R. China 100088
Tel : +86 10 6205 7040
Fax : +86 10 6205 7054

Email : info@gdc-tech.com
Website : www.gdc-tech.com



GDC Tech manufacturing facility is ISO 9001 : 2008 certified.

Copyright © 2012 GDC Technology Limited. All rights reserved. All trademarks listed in this brochure are properties of their respective owners. Specifications are subject to change without notice due to ongoing product development and improvement.

China Regional Technical Support

Changsha (长沙)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054

Chengdu (成都)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054

Chongqing (重庆)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 23 6311 8005

Guangzhou (广州)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 20 8329 9144

Shanghai (上海)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 21 6073 1256

Wuhan (武汉)

Tel : +86 400 886 0966 (Toll Free)
Fax : +86 10 6205 7054